
Jerry Whitehead: 580-571-2191

# LIKE **BEAR**

## Model 2K4DP



### 2K 4 Drum Overhead Puller

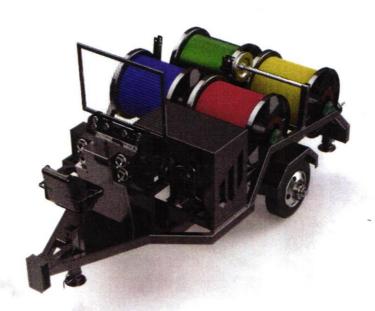

#### **Dimensions and Weights**

Length: 15' 5" Width: 94" OAW Height: 8' 11" G.V.W.R.: 11,400 lbs.

Empty Weight: 6000 lbs.

Payload: Approximately 5,400 lbs.

#### **Standard Features**

Engine: 49 hp water cooled diesel Levelwind: Automatic lead screw Running Gear: One 10,000 lb. single wheel axle with oil bath hubs

Brakes: 12 1/4" x 5" electric with selfcharging break-away system

Landing Gear: 12,000 lb. static drop

leg jack

Rear Jacks: Spring loaded retraction,

manual pin type

Wheels: 16" 8-hole Steel Tires: 235/80R 16" 14-Ply

Frame: 5x3 rectangular tubing Lights: Sealed beam with waterproof

wiring in nylon tubing.

Controls: Electric over hydraulic joystick for payout and take up. HP limiting function to allow operator maintainable line speed from full

drum to empty drum

Pressure Control: Hydraulic

pressure control valve

Hydraulics: Closed loop hydrostatic hydraulic drive. Integrated 4.4 gal hydraulic tank and cooler. Hydraulic gearbox with sprocket chain driven drums. Emergency shut down feature for operator safety

#### **Unit Performance**

Continuous Torque Rating: 36,000

in. lbs

Line Speed: 4 mph average

Actual Full Drum Pull Rating: 2,000

#### **Pulling Reel Specifications**

Quantity: Four Reel Diameter: 36" OD Reel Inside Width: 30 1/4" Core Diameter: 10 %"

Approximate Line Capacity: 9000 ft.

of 1/2" synthetic rope

Reel Brakes: Hydraulic actuated caliper from operator station with

16" diameter Disc

Reel Engagement: Mechanical clutch

engage with lockout function

Manufactured By



PO Box 1761 - Woodward, OK 73802 Phone: (580) 254-3766 Fax: (580) 256-3511

White's Welding, LLC White's Welding WhitesWelding1

www.whitesenergy.com