


LINE GEAR

RENTALS LLC

Model PT24K

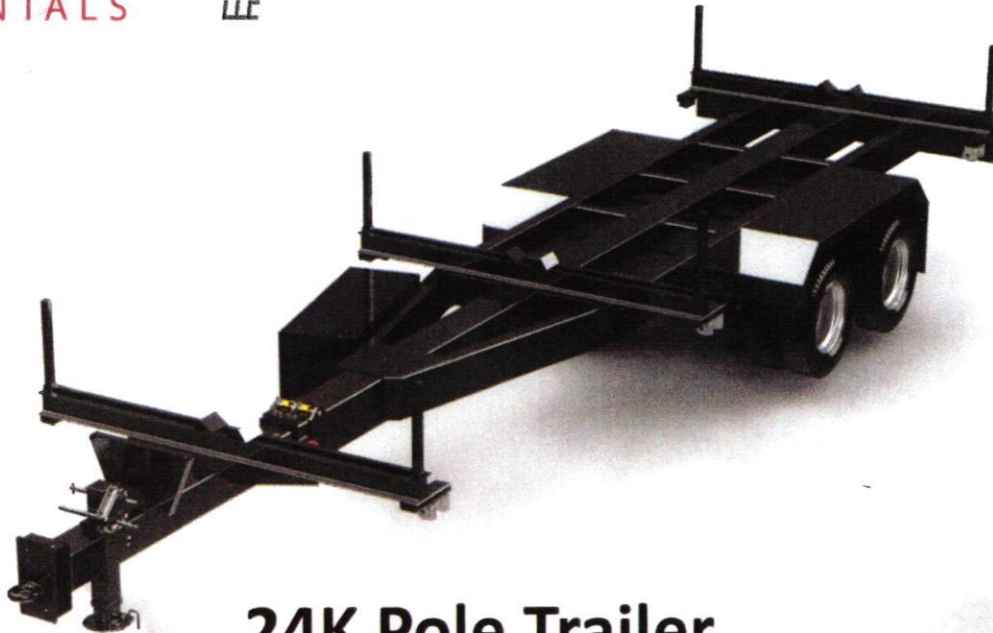

24K Pole Trailer



SPECIFICATIONS

| | |
|-----------------|---|
| Length | Extendable length from 31' to 47' (7 pinpoints with 6 equal intervals @ 32" apart) |
| Width | 8' OAW, with 95" Bolsters OAW (90.5" useable width) |
| Running Gear | Two 12,000 lb. dual wheel axle with oil bath hubs |
| Brakes | 12 ¼" x 5" electric with self-charging break-away system |
| Landing Gear | 12,000 lb. static drop leg jack |
| Wheels | 16" 8-hole Steel |
| Tires | 235/80R 16" 14-Ply |
| Tongue | 8" x 1/4" and 10 x 1/4" square tube; telescopes on rollers and UHMW |
| Frame | 10" x 4" x 3/16" & 8" x 4" x 3/16" Rectangular Tubing |
| Coupling System | 42,000 lb capacity x 2 ½" pintle eye, adjustable in 2 ¼" increments |
| Lights | Sealed beam with waterproof wiring in nylon tubing. |
| G.V.W.R. | 26,000 lbs. |
| Empty Weight | 6500 lbs. |
| Payload | Approximately 19,500 lbs. |
| Misc. | Tie down straps, wheel chocks, safety chains, slide in tube stanchions with keeper pins |

Options - 15,000 lb. axle / Additional length / Electric over hydraulic disc or drum brakes / Extended storage area / Custom paint color / Additional Toolbox / Sliding Stanchions

Manufactured By



PO Box 1761 – Woodward, OK 73802

Phone: (580) 254-3766 Fax: (580) 256-3511

White's Welding, LLC White's Welding WhitesWelding1
www.whitesenergy.com