


LINE GEAR

RENTALS LLC

Model BW36

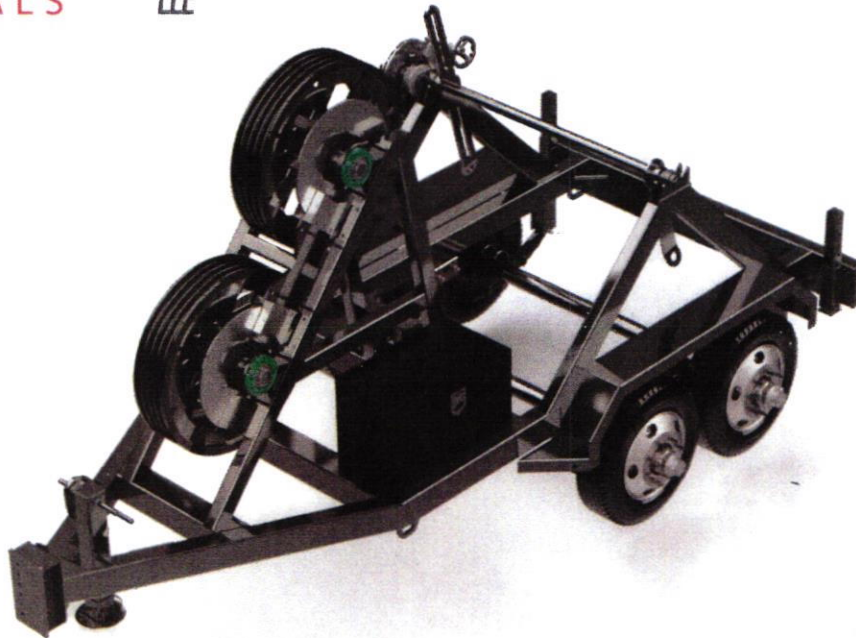

36" Bull Wheel Tensioner



Dimensions and Weights

Length: 16'
Width: 90" OAW
Height: 8' 11"
G.V.W.R.: 18,250 lbs.
Empty Weight: 3800 lbs.
Payload: Approximately 14,450 lbs.

Standard Features

Running Gear: Two 8,000 lb. single wheel axle with oil bath hubs
Brakes: 12 1/4" x 5" electric with self-charging break-away system
Landing Gear: 12,000 lb. static drop leg jack
Rear Jacks: Manual pin type

Wheels: 16" 8-hole Steel
Tires: 235/80R 16" 14-Ply
Frame: 6x4 rectangular tubing
Lights: Sealed beam with waterproof wiring in nylon tubing.
Toolbox: 18"x18"x30"

Unit Performance

Continuous Rated Tension: 3,000 lbs
Line Speed: 0-4 mph
Reel Capacity:
Maximum Reel Diameter: 72"
Maximum Reel Width: 55"
Maximum Reel Weight: 10,000 lbs
Shaft Diameter: 2-7/16"

Shaft Loading: Quick change reel shaft with accompanying hooks
Reel Brake: Manual hand crank caliper with 16" diameter bronze rotor

Bullwheel System

Reel Diameter: 36" OD
Reel Width: 8"
Conductor Grooves: 4 at 1.25"
Bullwheel Brakes: Hydraulic actuated calipers from operator station with 24" diameter stainless steel rotors
Conductor Guide: 4 roller fairlead to insure proper alignment

Manufactured By

PO Box 1761 – Woodward, OK 73802

Phone: (580) 254-3766 Fax: (580) 256-3511

White's Welding, LLC White's Welding WhitesWelding1

www.whitesenergy.com



WHITE'S WELDING
LLC